


# Modular Zero Point System ■ DropZero™

**Drop Zero ■ 5 Axis System ■ that locates, clamps and supports a workpiece**  
**Manual Operation ■ Max. Retention Force ■ 2700 lbs**

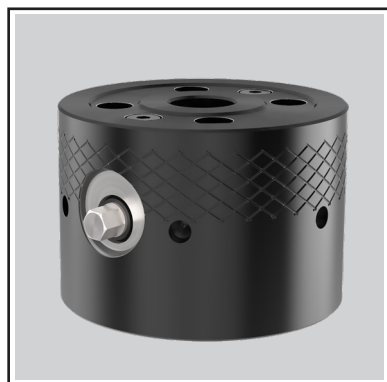

- Reduces setup time and fixturing costs
- Modular design works with all of CLM's 1/2" and 5/8" modular tooling.
- Can also be used with non-modular tooling
- Elevates workpiece for machine spindle clearance
- Access to all 5 sides of the part
- Stackable for added clearance

With a few turns of a wrench, new Drop Zero Modular Zero Point System quickly unloads and loads new parts in one setup, all while having access to all five sides of the workpiece. Pull studs (round, diamond, and floating) are mounted directly to a part, and clamp modules can be mounted to any fixture plate and can be stacked for added height. DropZero gives you better part quality due to a completely machined part in one setup, reduced fixturing costs, and simpler tool paths.



## Application Examples



Four Drop Zeros mounted on a Carr Lane Mfg. modular fixturing plate holding an aluminum billet part.



Example of side work for vertical applications.

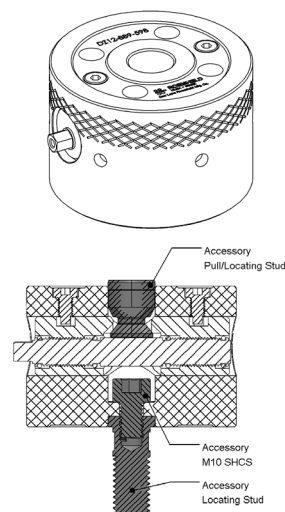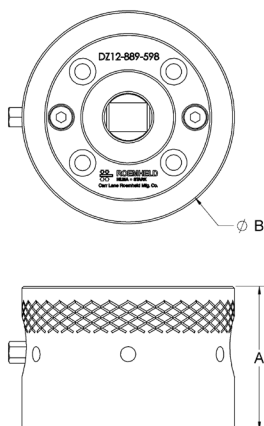

Operation	Manual
Type	Zero Point Mounting
Retention force (lbs) / Torque (ft-lbs)	2700 lbs/ 45 ft-lbs [12 kN/ 60 Nm]
A (in.)	2.35 ± 0.0004 in [59.8 ± 0.01 mm]
Ø B (in.)	3.50 in [88.9 mm]
Weight (lbs)	5.64 lbs [2.56 kg]
Part No.,	<b>CLR-DZ12-889-598</b>
Pallet Change Repeatability	≤ 0.0004 in [0.01 mm]

## Accessories

Part No., housing unit only	<b>CLR-DZ12-889-598-H</b>
Zero point locating stud/screw (1/2-13 UNC-2A)	<b>CLR-DZ12T-500Z</b>
Zero point locating stud/screw (5/8-11 UNC-2A)	<b>CLR-DZ12T-625Z</b>
Socket Head Cap Screw	<b>CLR-M10-1.50X16-SHCS</b>
Clamping spindle	<b>CLR-DZ12M-25</b>
Zero Point pull stud	<b>CLR-DZ12N-20Z</b>
Diamond pull stud	<b>CLR-DZ12N-20D</b>
Floating pull stud	<b>CLR-DZ12N-20F</b>
Floating pull stud without pallet/part locating shoulder	<b>CLR-DZ12N-195</b>
<b>Custom standoff</b>	<b>Available on request</b>
<b>Custom locating bushings</b>	<b>Available on request</b>

Subject to change. For further details, including detailed dimensions and mounting instructions, visit [roemheld-usa.com](http://roemheld-usa.com).



**ROEMHELD**

HILMA ■ STARK


Carr Lane Roemheld Mfg. Co.

**Carr Lane Roemheld Mfg. Co.**


Sales — Phone (314) 647-6200 Fax (314) 647-5736

Engineering — Phone 1-800-827-2526 Web [roemheld-usa.com](http://roemheld-usa.com)


## Pull Studs

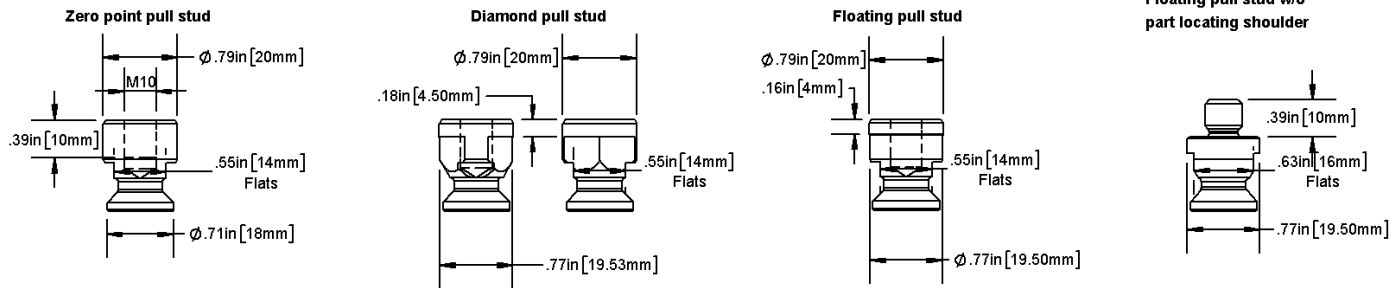



## Pull Studs Mounting Options

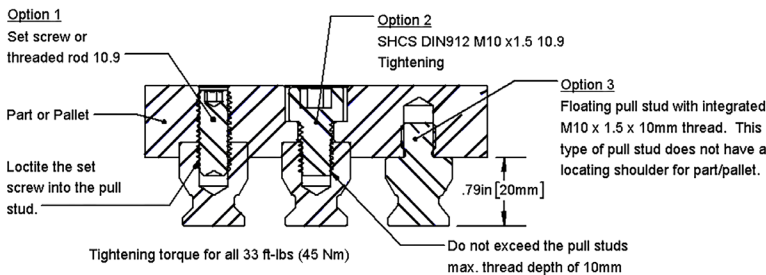

## Pull Studs Mounting Options

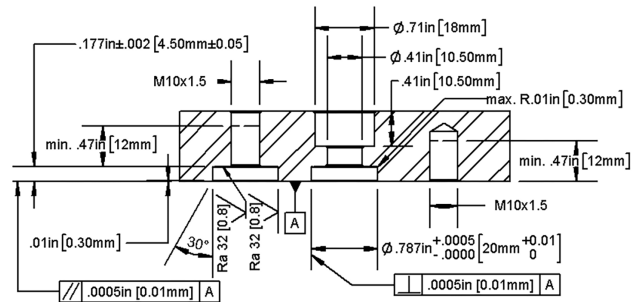

## Locating Studs for Modular Tooling

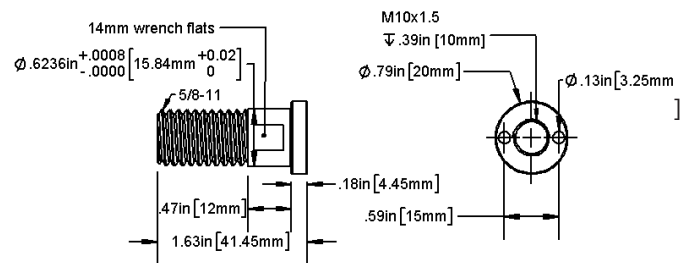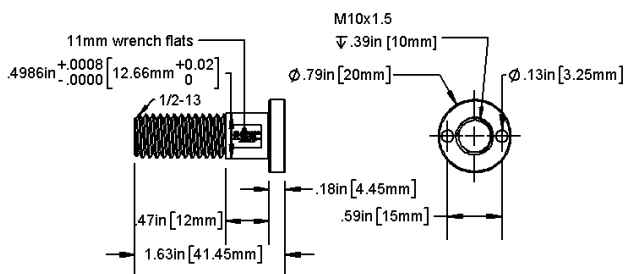

Subject to change. For further details, including detailed dimensions and mounting instructions, visit [roemheld-usa.com](http://roemheld-usa.com).



**ROEMHELD**

HILMA ■ STARK

Carr Lane Roemheld Mfg. Co.

**Carr Lane Roemheld Mfg. Co.**

Sales — Phone (314) 647-6200 Fax (314) 647-5736

Engineering — Phone 1-800-827-2526 Web [roemheld-usa.com](http://roemheld-usa.com)

## Tilting torque calculation example


### Benefit from our specialist competence

#### Example:

DropZero clamps, 4x, with 200 x 200 mm spacing and max. feed thrust force of 7 kN with distance of 400 mm.

#### Question:

Due to the predominance of roughing work, the system should be checked for 2x safety factor. Is the retention force, number of DropZero clamps and the selected spacing right for this application?

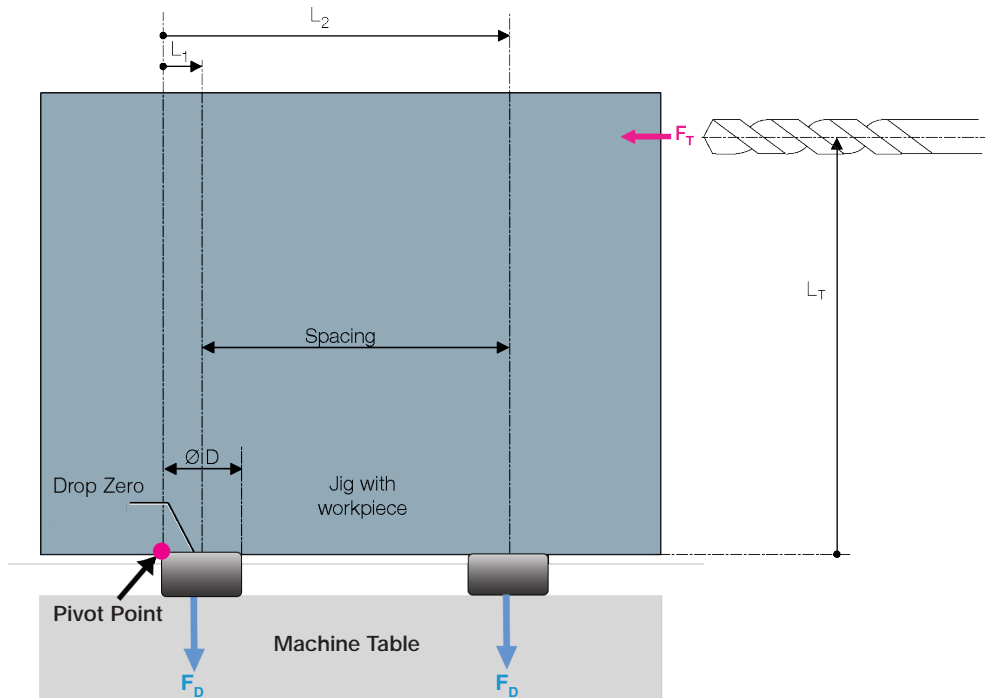

Solution:

$$M_D > 2 \times M_T ?$$

$$M_T = F_V \times L_V = 7,000 \text{ N} \times 0.4 \text{ m}$$

$$M_T = 2,800 \text{ Nm}$$

$$M_D = 2 \times (F_D \times L_1) + 2 \times (F_D \times L_2)$$

$$M_D = 2 \times F_D \times (L_1 + L_2)$$

$$L_1 = \text{ØD} / 2 = 0.0889 / 2 = 0.04445$$

$$L_2 = \text{ØD} / 2 + \text{Spacing} = 0.04445 + 0.20 = 0.24445$$

$$L_1 + L_2 = \text{ØD} + \text{Spacing}$$

$$L_1 + L_2 = 0.0889 \text{ m} + 0.20 \text{ m} = 0.2889 \text{ m}$$

$$M_D = 2 \times F_D \times (L_1 + L_2) = 2 \times 12,000 \text{ N} \times 0.2889 \text{ m}$$

$$M_D = 6,933.6 \text{ Nm}$$

$$M_D / M_T > 2 ?$$

$$M_D / M_T = 6,933 \text{ Nm} / 2,800 \text{ N} \quad M_D / M_T = 2.4 > 2 \quad \checkmark$$

With this design, a safety factor of two is provided. (All dimensions to be entered in SI units (meters, Newtons))

$M_T$  : Moment from Feed Thrust Force

$M_D$  : Moment from Retention force

$F_T$  : Feed Thrust Force (7,000 N)

$F_D$  : Retention force (12,000 N)

Spacing = 200 mm = 0.20 m

Ø D: 88.9 mm = 0.0889 m

$L_T$  : 400 mm = 0.40 m

Subject to change. For further details, including detailed dimensions and mounting instructions, visit [roemheld-usa.com](http://roemheld-usa.com).



**ROEMHELD**

HILMA ■ STARK

Carr Lane Roemheld Mfg. Co.


**Carr Lane Roemheld Mfg. Co.**

Sales — Phone (314) 647-6200 Fax (314) 647-5736

Engineering — Phone 1-800-827-2526 Web [roemheld-usa.com](http://roemheld-usa.com)





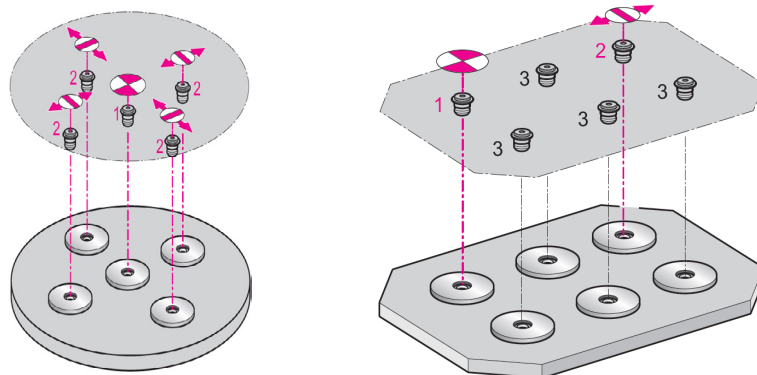

# Modular Zero-Point System ■ DropZero ■ Bundle Kits

## Application Examples Of Pull Stud Arrangements



## Standard Pull Stud Kits

Every standard Pull Stud Kit comes with at least one Zero-Point Pull Stud, one Diamond Pull Stud and one Locating Dowel. These are good for applications that require high repeatability between change overs.

Bundle Kit Part No.*	Quantities in Each Kit					
	DropZero CLR-DZ12-889-598 	Locating Dowel CLR-DZ12D-15 	Cap Screw CLR-M10- 1.50X16-SHCS 	Zero Point (Round) Pull Stud CLR-DZ12N-20Z 	Diamond Pull Stud CLR-DZ12N-20D 	Floating Pull Stud CLR-DZ12N-20F 
CLR-DZ12K-2S	2	2	2	1	1	-
CLR-DZ12K-3S	3	3	3	1	1	1
CLR-DZ12K-4S	4	4	4	1	1	2
CLR-DZ12K-5S	5	5	5	1	1	3
CLR-DZ12K-6S	6	6	6	1	1	4

\* Add "F" to the end of any of the above part numbers to make all the pull studs in the kit "Floating Pull Studs" part number CLR-DZ12N-20F.





\* Add "-500" to the end of any of the above part numbers to replace the CLR-DZ12D-15 Locating Dowels with CLR-DZ12T-500Z 1/2-13 Locating Studs for use with Carr Lane Mfg. modular tooling.

\* Add "-625" to the end of any of the above part numbers to replace the CLR-DZ12D-15 Locating Dowels with CLR-DZ12T-625Z 5/8-11 Locating Studs for use with Carr Lane Mfg. modular tooling.



## Non-Standard Pull Stud Kits

Non-standard Pull Stud Kits come with Locating Dowels and our Floating Pull Stud that does not have a locating shoulder for mating with your part or pallet. These are best used for setup applications that do not require high repeatability between change overs or when probing will be done prior to machining.

Bundle Kit Part No.*	Quantities in Each Kit			
	DropZero CLR-DZ12-889-598 	Locating Dowel CLR-DZ12D-15 	Cap Screw CLR-M10-1.50X16-SHCS 	Floating pull stud without pallet/part locating shoulder CLR-DZ12N-195 
CLR-DZ12K-2F	2	2	2	2
CLR-DZ12K-3F	3	3	3	3
CLR-DZ12K-4F	4	4	4	4
CLR-DZ12K-5F	5	5	5	5
CLR-DZ12K-6F	6	6	6	6

\* Add "-500" to the end of any of the above part numbers to replace the CLR-DZ12D-15 Locating Dowels with CLR-DZ12T-500Z 1/2-13 Locating Studs for use with Carr Lane Mfg. modular tooling.

\* Add "-625" to the end of any of the above part numbers to replace the CLR-DZ12D-15 Locating Dowels with CLR-DZ12T-625Z 5/8-11 Locating Studs for use with Carr Lane Mfg. modular tooling.



Subject to change. For further details, including detailed dimensions and mounting instructions, visit [roemheld-usa.com](http://roemheld-usa.com).

  
**ROEMHELD**  
HILMA ■ STARK  
Carr Lane Roemheld Mfg. Co.

**Carr Lane Roemheld Mfg. Co.**  
Sales — Phone (314) 647-6200 Fax (314) 647-5736  
Engineering — Phone 1-800-827-2526 Web [roemheld-usa.com](http://roemheld-usa.com)